


DUSTFIX®

Conditioners for Industrial Dusts

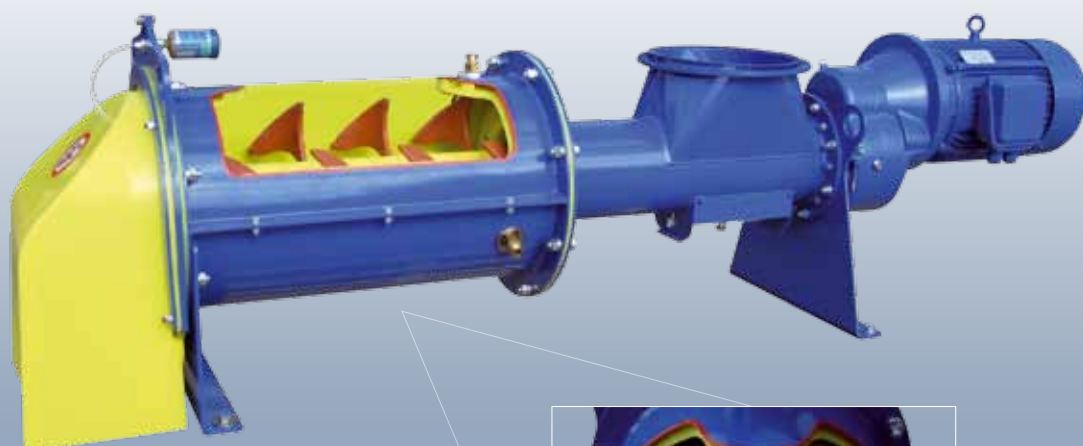

DUSTFIX®

Conditioners for industrial dusts
Conditioning Systems


DUSTFIX® is the most economical, technologically advanced, easily installed machine for conditioning industrial dusts.

It can be used for a variety of industrial applications in various different sectors, whenever dusts need to be treated for recycling purposes, storage or disposal. Dustfix can be used for mixing different powder and liquid additives, creating dust-free products or aggregating powders.


DUSTFIX® is suitable for continuous duty thanks to its particular technical features, use of innovative SINT® engineering polymers and its particularly rapid work cycle.

When it comes to operation and running economy, DUSTFIX® is the ideal machine for exhausting, conditioning and disposing of industrial dusts.

DUSTFIX® 20 / DUSTFIX® 40

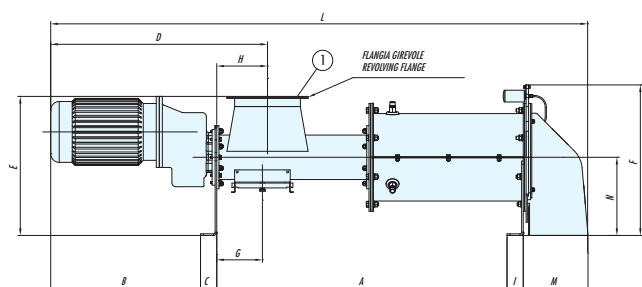


DUSTFIX® 80

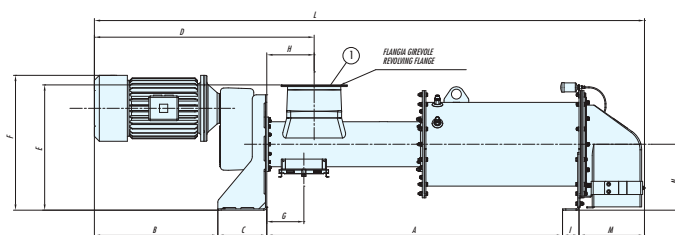

TYPE	A	B	C	D	E	F	G	H	I	L	M	N	kW	kg	m³/h
DUSTFIX 20	1,023.5	584	83	900	570	559	225	250	83	2045,5	258	300	5.5-7.5-9.2	265	20
DUSTFIX 40	1430	738	80	1,068	685	741	225	250	80	2,645	319	385	15-22	490	40
DUSTFIX 80	1,794.5	749	297	1,333.5	760	774	225	287.5	100	3,338	380	400	30	850	80

Dimensions in mm

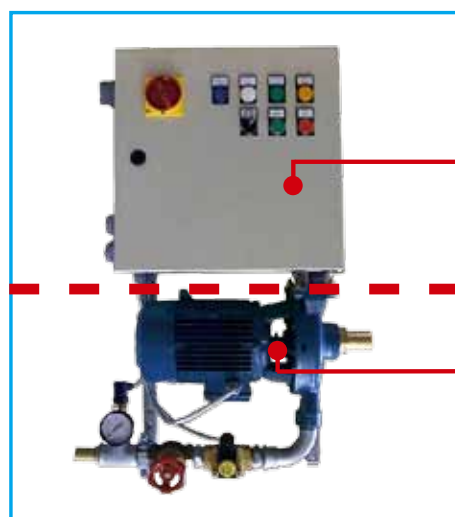

ELECTRIC PANEL



HYDRAULIC PANEL

After initial adjustment in the manual mode, the electro-hydraulic panel controls the operation of DUSTFIX®, the water flow rate, work and hold cycles in a fully automatic way.

Benefits



Attractive price;
Quick return on investment;
Easy and quick installation;
Minimum wear/very low maintenance cost;
No material residue;
Rotor completely removable and replaceable.

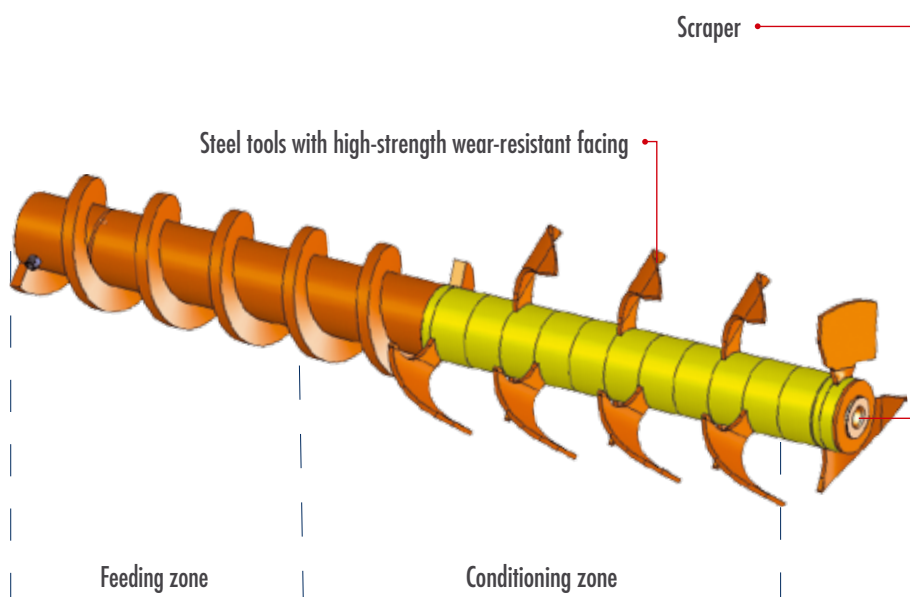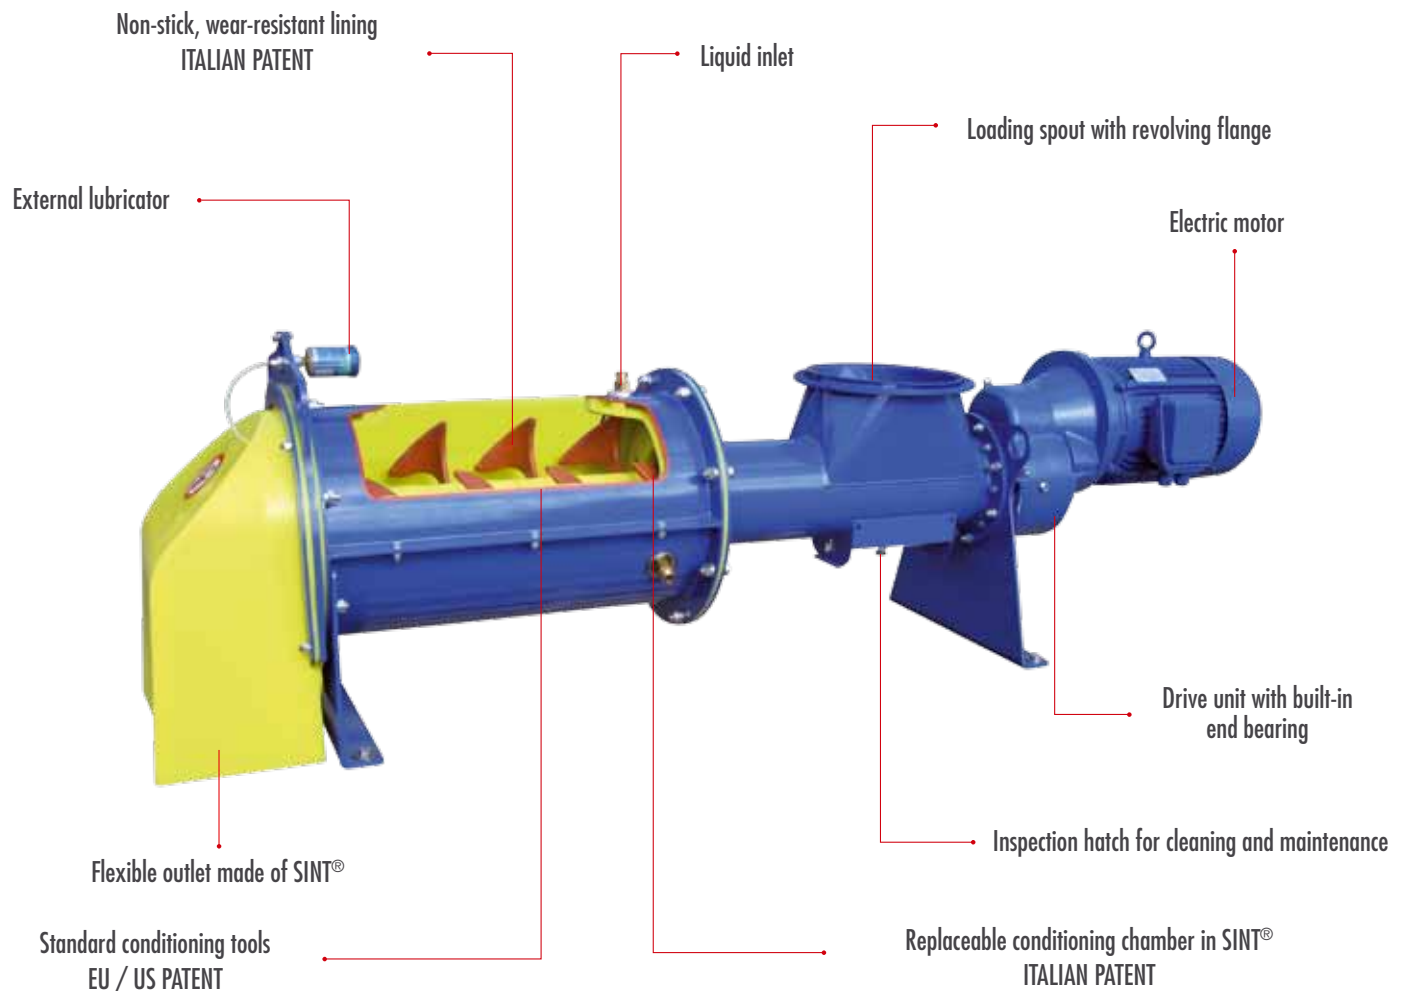

Applications




Foundries



Asphalt recycling



Steel mills

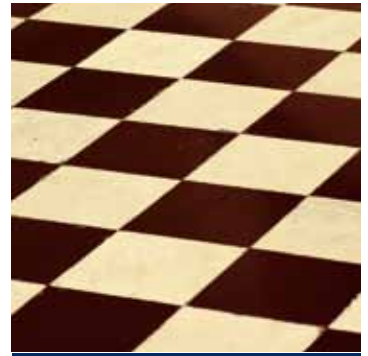

Ceramic industry




Quarries and Mines



Fertilizers



Sludge conditioning

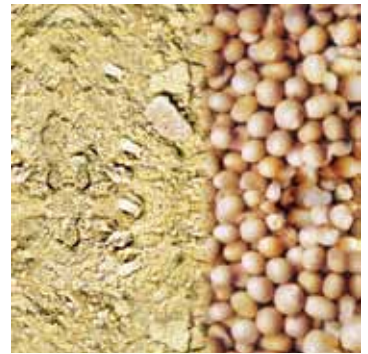

Animal Feed



MAP®



WAMGROUP



WAM®



FLITECH®



MAP®



EXTRAC®



SPECO®



TOREX®



OLI®



RONCUZZI®



TECNO CM