


## Conveyor & Elevator Belting | Bucket Elevator Belt

- The bucket elevator is designed for vertical transportation and is mainly used in handling powder or granular materials. It can shorten the distance of transportation by using the buckets fixed on the belt for vertical transportation.

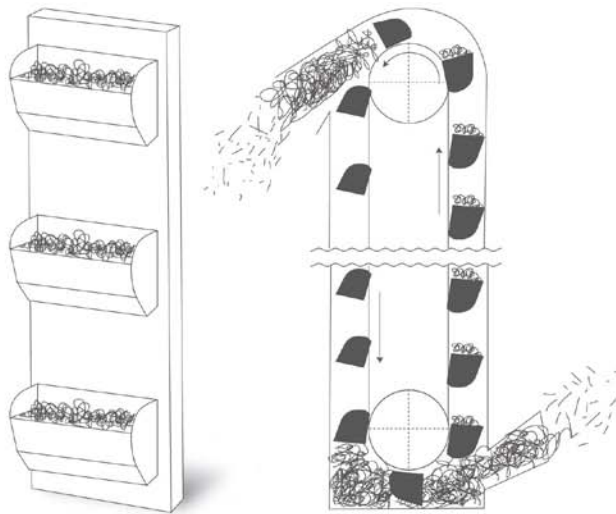

### Specification

Fabric	Strength (kg/cm/ply)	Ply	Specification of the cover rubber	Rubber grades	
Polyester / Nylon	100	2P	0.8mm x 0.8mm 1.5mm x 1.5mm 2.0mm x 2.0mm 1/32" x 1/32" 1/16" x 1/16" FS x FS BARE x BARE color of the bare side Brown Black	Abrasion resistant	
	135	3P			
	160	4P			
Polyester / Mono To increase cross rigidity	135	5P		Oil resistant	
	160				
Straight Warp Reduce the thickness and weight of the belt and save power under same belt strength.	315	1P	Heat resistant	Flame resistant	
	400				
	600	2P			
Kevlar The elongation is similar to that of the steel cord belt.	800	1P		Anti-static resistant	Chemical resistant
	1000				
	630				
	800				
	1000				
	1250				
	1400				
	1600				