

DESIGNED FOR PLANTS WHERE SPACE IS AN OPTION

The waste water enters the WASTEMASTER GCV Screw Screen through a flanged connection with the supply pipe. WASTEMASTER GCV carries out solids-liquid separation with great efficiency by de-watering and compacting the effluent in a special discharge module.

By providing continuous cleaning of the screen, special brushes on the outside diameter of the screw flight optimise separation efficiency.

The collar clamp brackets and the optional base frame ensure quick and easy installation.

Technical Features

- For municipal and industrial solids-liquid separation of effluents
- All fabricated parts in 304L / 316L stainless steel
- Screw in 304 L / 316 L stainless steel or special high-resistance steel
- Flight brushes for continuous cleaning of the screen
- Screens with different mesh types (3, 6 or 10 mm)
- Great versatility of application due to wide range of accessories



Insulated discharge module




Highly efficient outlet spout in plastic material



Inlet spout and split screen basket



Washing tube

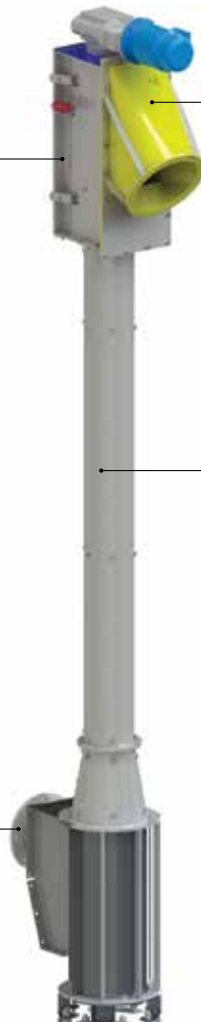

Application



202001337 April 2018 Rights reserved to modify technical specifications.

This brochure has been edited for distribution in European Union countries



SAVECOTM
Member of WAMGROUP[®]



INQUIP[®]
BULK MATERIAL
& DUST HANDLING

22 Beneficial Way Wangara WA 6065 ☎ (08) 6314 1100
🌐 inquip.com.au ✉ info@inquip.com.au

ABN 15 130 794 151

PRODUCT » DENSITY » FLOW